

Casaferra[®]
Porcelain.Elegance.Sustainability

C10, Central Section, China Ceramics Industry Headquarters
No.68, West Ji Hua Road, Foshan City

TEL:0757-8533 9907

www.casaferra.com



Casaferra[®]
Porcelain.Elegance.Sustainability



翡瑞的每一次出现都让你感受到生活的高雅

Every appearance of Casaferra can make you feel the elegance of life

Essence


Essence stems from the desire to create a natural product with a European aristocratic temperament contemporary and warm minimalism.

Essence系列的本源是希望创造一套具有欧洲贵族气质兼具现代，温暖极简主义的天然木纹系列产品。

Ivory EN02
200X1200mm/8"x48"

Essence

SIZE



SURFACE



FEATURES



Micro-Engraving Technology



High-Definition Effect



Easy to Maintain

FEATURES



Wall Tile



Floor Tile



Residential



Commercial



Public

EN01
Perla

EN02
Ivory

EN06
Olive

EN08
Ebano



The warm and delicate wood texture gives the fashionable space a high-level texture.
 温润细腻的木纹肌理赋予时尚空间的高级质感



Perla EN01
 Floor / 200X1200mm/8" x 48"



Ivory EN02
 Floor / 200X1200mm/8"x48"



Essence can not only retain the warm feeling of wood floor, but also scratch, smash and water stain resistant, and the space is large.
 EN系列不仅可以保留木地板的温馨感,而且耐刮、耐砸、耐水污,通铺又显得空间大。



Real public space imitation wood grain floor tile and wall tile, even in high traffic public places can also give a sense of tranquility.
 真实的公共空间仿木纹地砖和墙砖，即使在高流量的公共场所也能赋予宁静的感觉
 即使在高流量的公共场所也能赋予宁静的感觉



Olive EN06
 Floor / 200X1200mm/8" x 48"



Ebano EN08
Floor / 200X1200mm/8" x 48"

Perla EN01

200x1200mm / 8"x48"

24 Faces

± 10.5mm



Ivory EN02

200x1200mm / 8"x48"

24 Faces

± 10.5mm



Olive EN06

200x1200mm / 8"x48"

24 Faces

± 10.5mm



Ebano EN08

200x1200mm / 8"x48"


24 Faces

± 10.5mm






Laying
Proposals


Before laying, it is recommended to check the color number, size and so on, in order to achieve better results; it is suggested that the special joint mixture of Casaferra tile be used for all products of Casaferra tile; There shall be a seam for paving, and it is suggested that Casaferra's products have a 2mm.

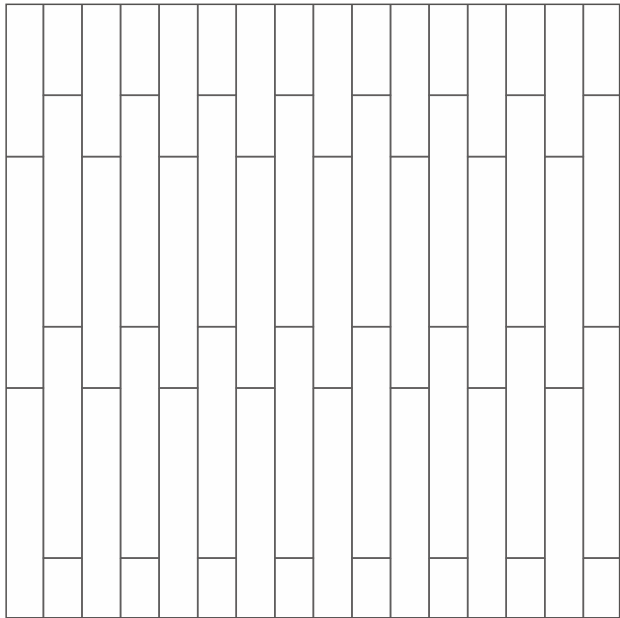


a.

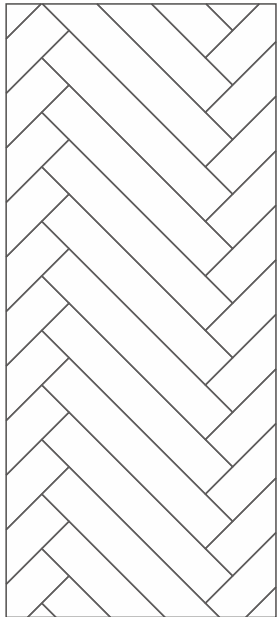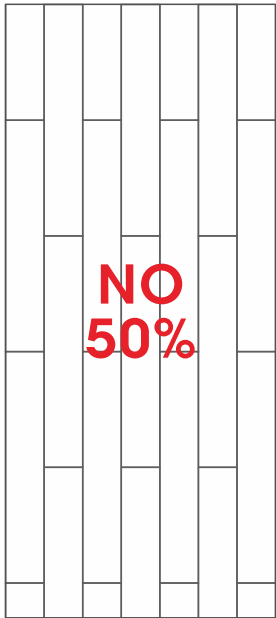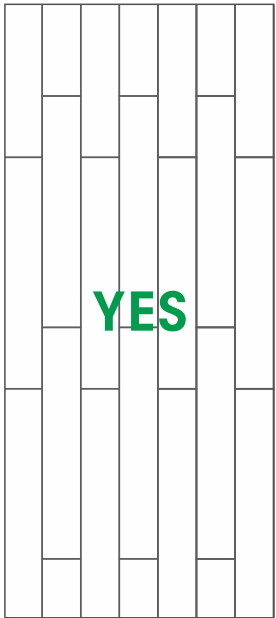


b.

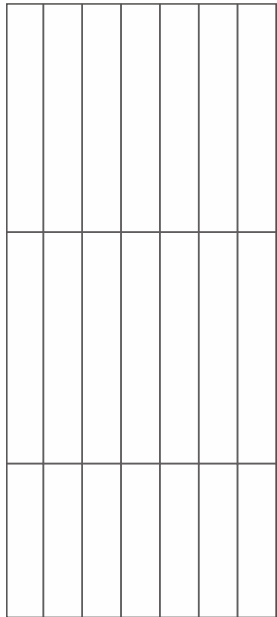

c.

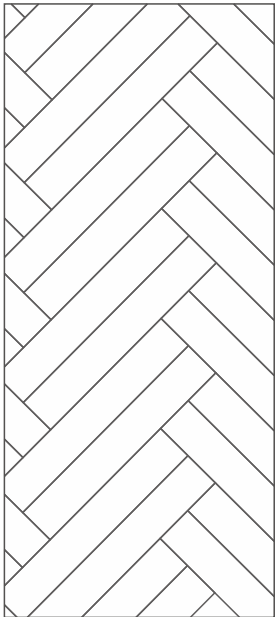

d.

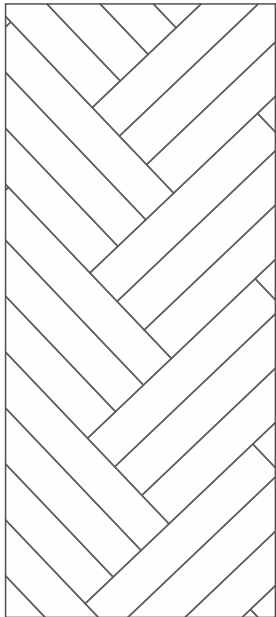

e.

Technical Performance

MEASUREMENT AND SURFACE APPEARANCE		TEST METHOD	INTERNATIONAL STANDARDS	Casaferra VALUE
	LENGTH	ISO 10545-2	± 0.6%, ± 2.0mm	± 0.1%, ± 1.0mm
	WIDTH	ISO 10545-2	± 0.6%, ± 2.0mm	± 0.1%, ± 1.0mm
	THICKNESS	ISO 10545-2	± 5%, ± 0.5mm	± 1%, ± 0.3mm
	SURFACE FLATNESS	ISO 10545-2	± 0.5%, ± 2.0mm	± 0.5%, ± 2.0mm
	STRAIGHTNESS OF SIDES	ISO 10545-2	± 0.5%, ± 1.5mm	± 0.02%, ± 0.1mm
	RECTANGULARITY	ISO 10545-2	± 0.5%, ± 2.0mm	± 0.1%, ± 1.0mm
	WATER ABSORPTION	ISO 10545-3	Ebs0.5%	Ebs0.5%
			Individual maximum 0.6%	Individual maximum 0.6%
	BREAKING STRENGTH	ISO 10545-4	≥ 1300N	≥ 1300N
	MODULUS OF RUPTURE	ISO 10545-4	Minimum 35	Minimum 35
			Individual minimum 32	Individual minimum 32
	STAIN RESISTANCE	ISO 10545-14	Minimum Class 3	Class 5 Livello 5 Clase5
	ABRASION RESISTANCE	ISO 10545-7	Report abrasion class	Class 4
			Report cycles passed	1500
	FROST RESISTANCE	ISO 10545-12	Required	Pass
	CRAZING RESISTANCE	ISO 10545-11	Required	Pass
	SLIP RESISTANCE	DIN 51097	Class A, B and C	Matt: Class B
		GB/T 4100-2015 Appendix M	μ≥0.5	Static friction coefficient of floor tile ≥0.5



Packing Information

Casaferra®						
FORMAT(mm/in)	PCS/BOX	SQM/BOX	KG/BOX	BOX/PALLET	SQM/PALLET	KG/PALLET
200x1200mm 8"x48"	4	0.96	22	45	43.2	1005