

LG LEGNO

Casaferra®
Porcelain. Elegance. Sustainability



LEGNO


La serie Legno è il ceppo più autentico proveniente dalla natura. Attraverso un'attenta osservazione, Casaferri non solo riproduce con cura la delicata consistenza dei ceppi nell'antica foresta, ma conserva anche con audacia i fili minerali (Mineral Streak) nei ceppi per ripristinare la bellezza della natura.

The Legno series is the most authentic log sourced from nature. Through careful observation, Casaferri not only carefully reproduces the delicate texture of the logs in the ancient forest, but also boldly retains the mineral threads (Mineral Streak) in the logs to restore the beauty of nature.





I tre colori caldi della serie Legno vanno dal chiaro allo scuro. I colori sono armoniosi e stratificati, creando un senso di calore domestico.

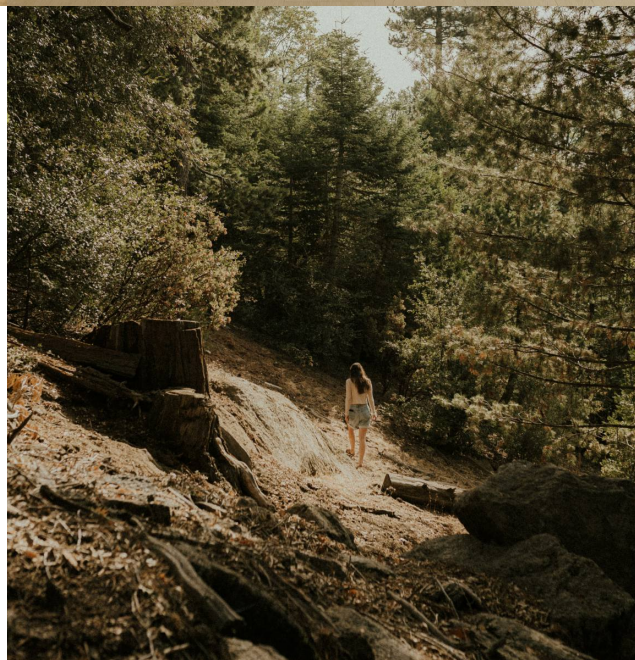

Casaferro[®]
Porcelain.Elegance.Sustainability

The three warm colors of the Legno series range from light to dark.
The colors are harmonious and layered, creating a sense of home warmth.



3D TECH DIGI TOUCH

Attraverso una raffinata incisione con tecnologia avanzata di stampi digitali, la texture tridimensionale dei tronchi naturali concavi e convessi viene presentata in modo vivido, mostrando la precipitazione del tempo e la traiettoria di vita unica degli alberi, offrendo alle persone un'esperienza tattile delicata senza precedenti, combinata con 24 diversi layout, l'effetto visivo è quasi lo stesso del legno vero.

Through fine carving using advanced digital mold technology, the three-dimensional texture of the concave and convex natural logs is vividly presented, showing the precipitation of time and the unique life trajectory of the trees, giving people an unprecedented delicate tactile experience, combined with 24 different layouts, the visual effect is almost the same as real wood.



FLOOR LIGHT-LG01 : 20x120-8"x48"



FLOOR LIGHT-LG01 : 20x120-8"x48"







FLOOR PURE-LG02. 20x120-8"x48"



FLOOR PURE-LG02. 20x120-8"x48"





FLOOR INTENSE-LG05, 20x120-8"x48"



FLOOR INTENSE-LG05, 20x120-8"x48"



LEGNO

LIGHT LG01

200x1200mm / 8"x48"

24 Faces



LEGNO

PURE LG02

200x1200mm / 8"x48"

24 Faces



LEGNO

INTENSE LG05

200x1200mm / 8"x48"


24 Faces




Laying Proposals

▼
2mm
▲


Before laying, it is recommended to check the color number, size and so on, in order to achieve better results; it is suggested that the special joint mixture of Casaferra tile be used for all products of Casaferra tile; There shall be a seam for paving, and it is suggested that Casaferra's products have a 2mm.

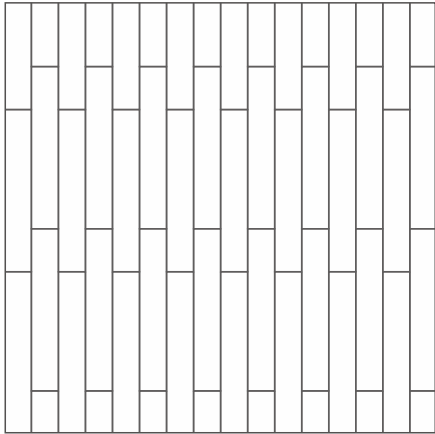


a.

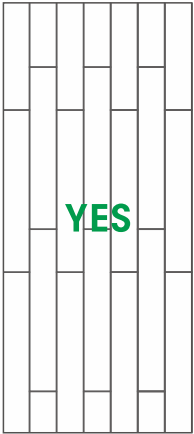


YES

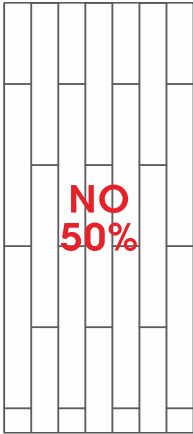


NO
50%

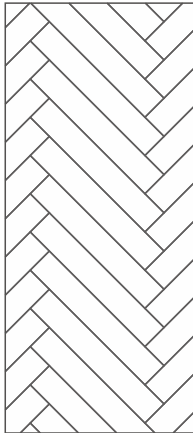


b.

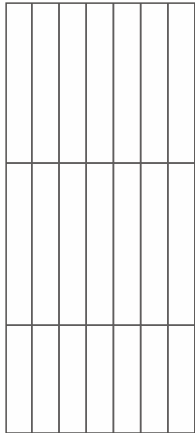

c.

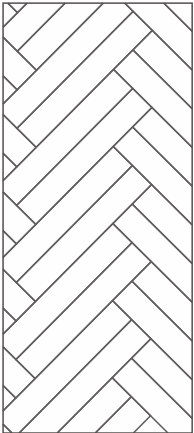

d.

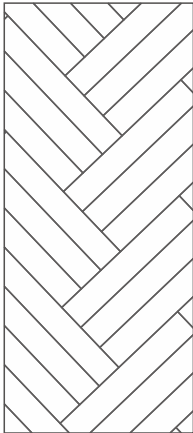

e.

Technical Performance

MEASUREMENT AND SURFACE APPEARANCE	TEST METHOD	INTERNATIONAL STANDARDS	Casaferro VALUE
	LENGTH	ISO 10545-2	± 0.6%, ± 2.0mm
	WIDTH	ISO 10545-2	± 0.6%, ± 2.0mm
	THICKNESS	ISO 10545-2	± 5%, ± 0.5mm
	SURFACE FLATNESS	ISO 10545-2	± 0.5%, ± 2.0mm
	STRAIGHTNESS OF SIDES	ISO 10545-2	± 0.5%, ± 1.5mm
	RECTANGULARITY	ISO 10545-2	± 0.5%, ± 2.0mm
	WATER ABSORPTION	ISO 10545-3	Eb≤0.5%
		Individual maximum 0.6%	Individual maximum 0.6%
	BREAKING STRENGTH	ISO 10545-4	> 1300N
	MODULUS OF RUPTURE	ISO 10545-4	Minimum 35
		Individual minimum 32	Individual minimum 32
	STAIN RESISTANCE	ISO 10545-14	Minimum Class 3
			Class 5 Low B5 Class 5
	ABRASION RESISTANCE	ISO 10545-7	Report abrasion class
			Report cycles passed
			1500
	FROST RESISTANCE	ISO 10545-12	Required
			Pass
	CRAZING RESISTANCE	ISO 10545-11	Required
			Pass
	SLIP RESISTANCE	DIN 51097	Class A, B and C
		GB/T 4100-2015 Appendix M	Class B
			Static friction coefficient of floor tile ≥0.5



Packing Information

Casaferro						
FORMAT(mm/in)	PCS/BOX	SQM/BOX	KG/BOX	BOX/PALLET	SQM/PALLET	KG/PALLET
200x1200mm 8"x48"	6	1.44	33	36	51.84	1188

Every appearance of **Casaferra**[®]
can make you feel the elegance of life

C10, Central Section, China Ceramics Industry Headquarters

No.68, West Ji Hua Road, Foshan City

www.casaferra.com

TEL:0757-8533 9907